

EOS-240 U9

T A G E O S

## Datasheet

### Cost-effective Global Solution for Dense Tag Populations



The EOS-240 U9 inlay is optimized within a small footprint to offer superior dense population performance across global markets with the latest UCODE 9 technology from NXP. It is an ideal low-cost solution for inventory management in non-food industries as varied as retail apparel to cosmetics, accessories/sunglasses, jewelry and also pharmaceuticals.

EOS-240 U9 is available in dry, wet, and paper-face delivery formats.

EOS-240 U9 uses NXP's UCODE 9 IC, which enables long read distance and fast inventory of dense RFID tag populations. The chip also features 96-bit EPC; kill password; EPC and kill password permalock; self-adjusting impedance; and memory integrity safeguards.

Tageos maintains ARC Quality Certification for all its manufacturing sites worldwide and is one of the first companies to be certified by Auburn University's RFID Lab since 2020.

Tageos complies with ISO 9001:2025 Quality Management and ISO 14001:2015 Environmental Management as well as utilizing sustainable manufacturing processes and materials, such as FSC®-certified paper, whenever possible. In addition, all Tageos products meet the RoHS and REACH environmental directives.

#### Overview


IC:	NXP UCODE 9
EPC/User Memory:	96 bit / - bit
TID Memory:	96 bit incl. 48 bit unique S/N
Frequency Band:	860 - 960 MHz (ETSI)
Protocol:	EPC Class 1 Gen 2 ISO 18000-63

#### Application Areas

- Apparel
- Accessories & Jewelry
- Beauty & Cosmetics
- Inventory Visibility
- Item Level Tagging
- Pharma & Healthcare



The mark of  
responsible forestry  
FSC® C166692

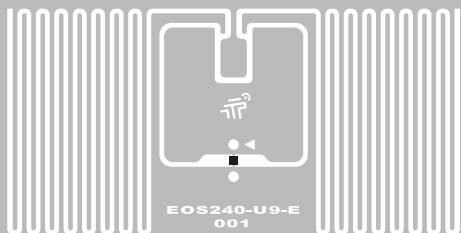


EOS-240 U9

TAGEOS

## Technical Overview

	Dry Inlay	Wet Inlay	Paper-face inlay
Product Code	2000000077	2000000078	2000000079
Antenna Size	30 x 15 mm 1.18 x 0.59 in	30 x 15 mm 1.18 x 0.59 in	30 x 15 mm 1.18 x 0.59 in
Finish Size	- -	33 x 18 mm 1.30 x 0.71 in	33 x 18 mm 1.30 x 0.71 in
Web Width	40 ± 1 mm 1.57 ± 0.04 in	40 ± 1 mm 1.57 ± 0.04 in	40 ± 1 mm 1.57 ± 0.04 in
Pitch	23.53 ± 0.2 mm 0.93 ± 0.001 in	23.53 ± 1 mm 0.93 ± 0.04 in	23.53 ± 1 mm 0.93 ± 0.4 in
ARC Approvals	-	-	-
FSC® Certification	-	-	-
Antenna Material	Aluminium	Aluminium	Aluminium
Front Face	-	Clear PET	TT Paper
Inlay Substrate	Clear PET	Clear PET	Clear PET
Inlay Adhesive	-	Permanent	Permanent
Liner	-	Paper	Paper
Operating Temperature	-40°C / +85°C -40°F / +185°F	-40°C / +85°C -40°F / +185°F	-40°C / +85°C -40°F / +185°F
Shelf Life	2 years @ +25°C/40% RH	2 years @ +25°C/40% RH	2 years @ +25°C/40% RH
Final Inspection	100% tested	100% tested	100% tested

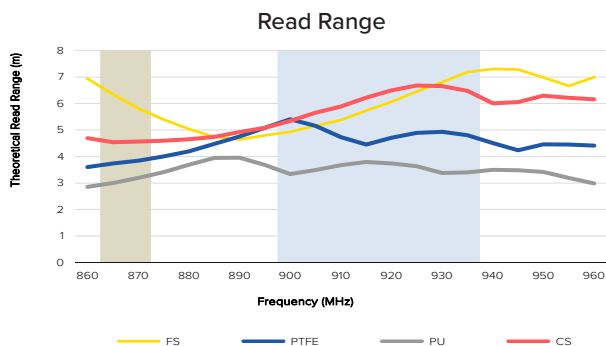


### Contact us:

Tageos HQ . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



**Graphs:** All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a normal output power level and respective IC silicon. **Storage & handling precautions:** Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use. This is a general purpose product not designed or intended for any specific application.

© 2025 Tageos. All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

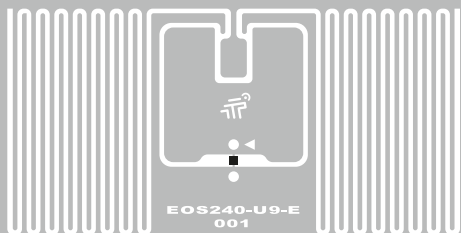


EOS-240 U9


TAGEOS

## Product Specifications

### Mechanical Dimensions

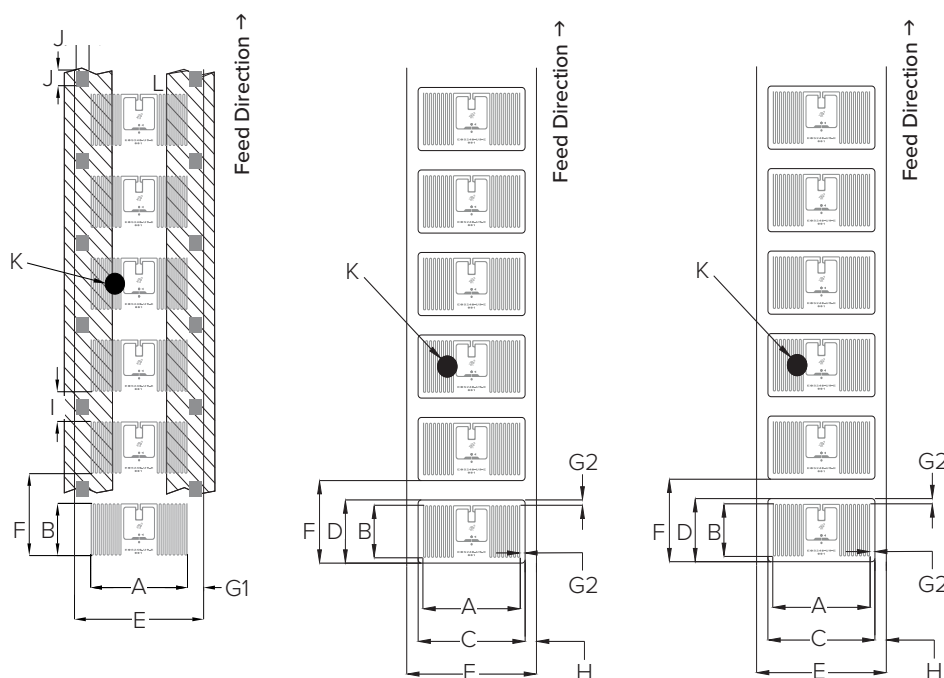

		Dry Inlay	Wet Inlay	Paper-face inlay
Product Code		2000000077	2000000078	2000000079
Antenna Size	A x B	30 x 15 mm / 1.18 x 0.59 in	30 x 15 mm / 1.18 x 0.59 in	30 x 15 mm / 1.18 x 0.59 in
Finish Size	C x D	-	33 x 18 mm / 1.30 x 0.71 in	33 x 18 mm / 1.30 x 0.71 in
Web Width	E	40 ± 1 mm / 1.57 ± 0.04 in	40 ± 1 mm / 1.57 ± 0.04 in	40 ± 1 mm / 1.57 ± 0.04 in
Pitch	F	23.53 ± 0.2 mm / 0.93 ± 0.001 in	23.53 ± 0.1 mm / 0.93 ± 0.04 in	23.53 ± 0.1 mm / 0.93 ± 0.04 in
Antenna to Web Edge	G1	5 ± 1 mm / 0.20 ± 0.04 in	-	-
Antenna to Die-cut	G2	-	1.5 ± 1 mm / 0.06 ± 0.04 mm	1.5 ± 1 mm / 0.06 ± 0.04 mm
Die-cut to Web Edge	H	-	3.5 ± 1 mm / 0.14 in ± 0.04 in	3.5 ± 1 mm / 0.14 in ± 0.04 in
Antenna Gap	I	8.53 mm / 0.34 in	-	-
Converting Spot	J	4.5 x 4 mm / 0.18 x 0.16 in	-	-
Bad Mark	K	Ø 6 mm / 0.24 in	Ø 6 mm / 0.24 in	Ø 6 mm / 0.24 in
Interleaves	L	yes	no	no

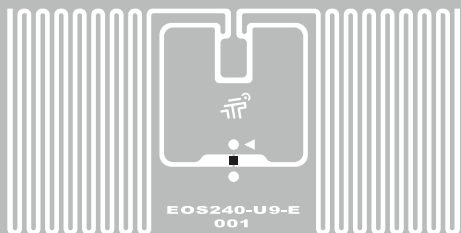

# EOS-240 U9

# TAGEOS

## Packing Details

	Dry Inlay	Wet Inlay	Paper-face inlay
Product Code	2000000077	2000000078	2000000079
Delivery Format	Roll (single row)	Roll (single row)	Roll (single row)
Core Inner Diameter	76 mm / 3 in	76 mm / 3 in	76 mm / 3 in
Roll Outer Diameter	318 mm / 12.52 in	340 mm / 13.39 in	201 mm / 7.91 in
Unwinding Direction	Inlay on outside of roll	Inlay on outside of roll	Inlay on outside of roll
Standard Roll Size	24 100 (-0% + 1.5%)	21 000 (-0% + 1.5%)	4 500 (-0% + 1.5%)
Min. Guar. Yield/Roll	99%	99%	99%
Box Dimensions	39.5 x 39 x 17 cm	39.5 x 39 x 17 cm	26 x 26 x 37 cm
	15.56 x 15.35 x 6.69 in	15.56 x 15.35 x 6.69 in	10.24 x 10.24 x 14.57 in
Roll/Box	3	3	7
Inlays/Box	72 300	63 000	31 500
Box Gross Weight	8.77 kg / 19.34 lbs	10.63 kg / 23.44 lbs	7.88 kg / 17.37 lbs
Pallet Dimensions	120 x 80 x 151 cm	120 x 80 x 151 cm	120 x 80 x 126 cm
	47.2 x 31.5 x 59.4 in	47.2 x 31.5 x 59.4 in	47.2 x 31.5 x 49.6 in
Boxes/Pallet	48	48	36
Inlays/Pallet	3 470 400	3 024 000	1 134 000
Pallet Gross Weight	446 kg / 983 lbs	535 kg / 1180 lbs	309 kg / 681 lbs

### Contact us:

Tageos HQ . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



© 2025 Tageos All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.