

EOS-241 M830

TAGEOS

Datasheet



TAGEOS

One Inlay for Almost Everything in Retail

The EOS-241 M830 delivers truly best-in-class performance in a highly versatile, ultra-compact footprint that simplifies tag management for large-scale retail deployments. It is the first 42x16 mm RAIN (UHF) RFID inlay on the market to receive ARC certification for specs R and Y2, enabling fast, reliable, long-range readability on a huge selection of retail apparel and general merchandise items.

The EOS-241 M830 inlay is available in dry, 6up width web format.

The inlay is based on Impinj's M830 RAIN RFID IC with 128-bit EPC memory. The new IC combines improved read sensitivity (-1.5 dB, compared to M730), AutoTune™ performance, and backscatter efficiency with a size reduction to support Tageos' sustainability approach. As a result, the EOS-241 M830 sets new standards in applications like high-speed inventory

counting, loss prevention with frictionless self-checkout, and embedded tagging with seamless product returns.

Tageos maintains annual ARC Quality Certification for all manufacturing sites worldwide and was among the first companies to receive certification for its manufacturing processes from the Auburn University RFID Lab in 2020. The EOS-241 M830 complies with ARC specifications F, O, Q, R, Y2, W5, W6.

In addition, all Tageos products meet the RoHS and REACH environmental directives.

Tageos complies with ISO 9001:2025 Quality Management and ISO 14001:2015 Environmental Management as well as utilizing sustainable manufacturing processes and materials, such as FSC®-certified paper, whenever possible.

Overview


IC:	Impinj M830
EPC/User Memory:	128 bit / - bit
TID Memory:	96 bit incl. 48 bit unique S/N
Frequency Band:	860 - 960 MHz
Protocol:	EPC Class 1 Gen 2 - ISO 18000-63

Application Areas

- Accessories & Jewelry
- Apparel
- Consumer Electronics
- Inventory Visibility
- Supply Chain Mgmt.
- ... and many more.



The mark of responsible forestry
FSC® C166692

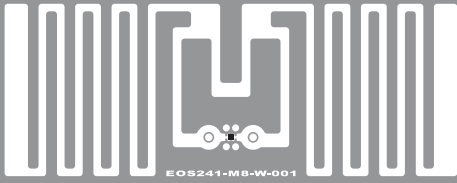


EOS-241 M830

TAGEOS

Technical Overview

Dry - 6up

Product Code	2400000307	
Antenna Size	42 x 16 mm 1.65 x 0.63 in	
Finish Size	-	
Web Width	340.00 ± 1 mm 13.386 ± 0.04 in	
Pitch	22.23 ± 0.2 mm 0.875 ± 0.01 in	48.00 ± 0.2 mm 1.890 ± 0.01 in
ARC Approval	F, O, Q, R, Y2, W5, W6	
FSC® Certification	-	
Antenna Material	Aluminium	
Front Face	-	
Inlay Substrate	PET Clear 50µm	
Inlay Adhesive	-	
Liner	-	
Operating Temperature	-40°C / +85°C -40°F / +185°F @20% to 90% RH	
Shelf Life	2 years @ +25°C/40%RH	
Final Inspection	100% tested	

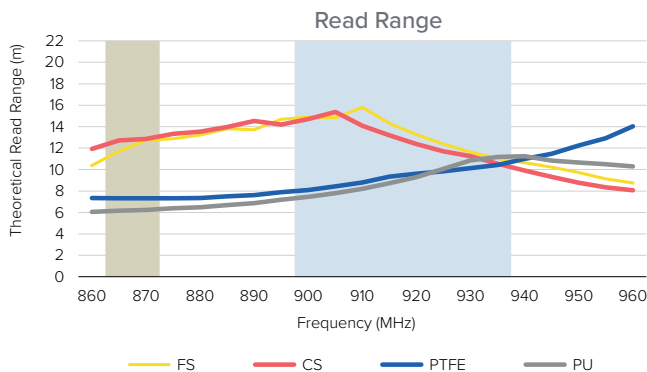


Contact:

Tageos SAS (HQ) . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



Graphs: All the graphs are indicative; performance in real life applications may vary. The data has been determined based on calculations for transmitters with a normal output power level and respective IC silicon. **Storage & handling precautions:** Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use. This is a general purpose product not designed or intended for any specific application.

© 2025 Tageos. All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

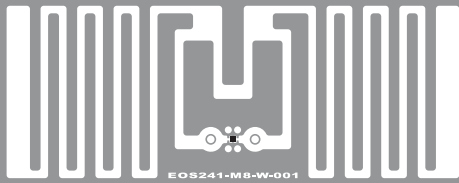


EOS-241 M830

TAGEOS


Product Specifications

Mechanical Dimensions

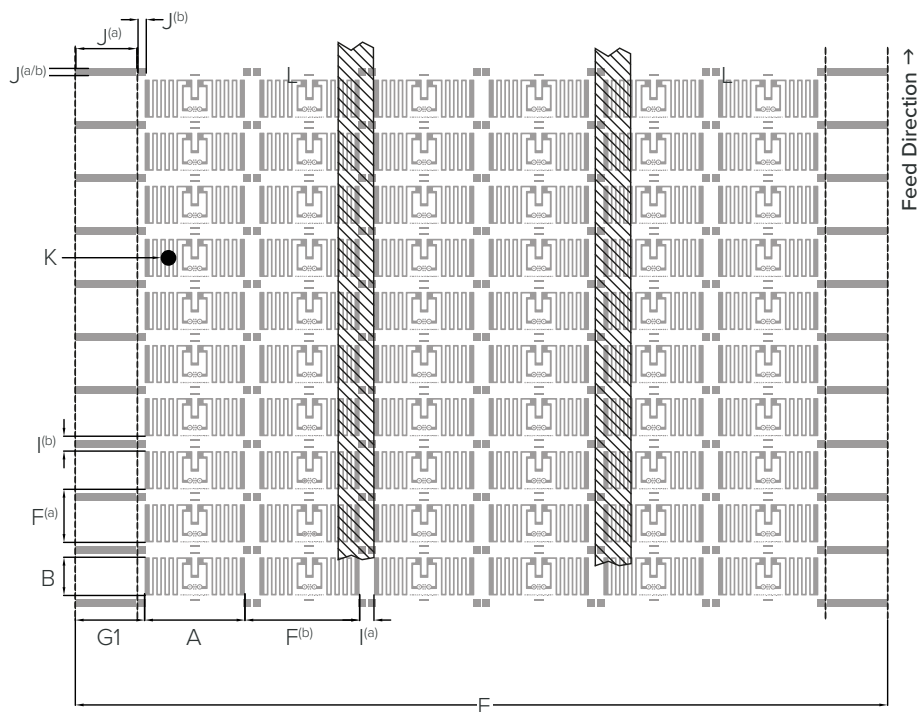

Dry - 6up

Product Code	2400000307	
Antenna Size	A x B 42 x 16 mm / 1.65 x 0.63 in	
Finish Size	C x D - / -	
Web Width	E	340.00 ± 1 mm / 13.386 ± 0.04 in
Pitch	F	22.23 ± 0.2 mm / 0.875 ± 0.01 in ^(a) 48.00 ± 0.2 mm / 1.890 ± 0.01 in ^(b)
Antenna to Web Edge	G1	29.0 ± 1 mm / 1.141 ± 0.04 in
Antenna to Die-cut	G2	-
Die-cut to Web Edge	H	-
Antenna Gap	I	6.00 mm / 0.236 in ^(a) 6.23 mm / 0.245 in ^(b)
Converting Spot	J	25.50 x 3.00 mm / 1.003 x 0.118 in ^(a) 3.50 x 3.00 mm / 0.138 x 0.118 in ^(b)
Bad Mark	K	Ø 6.0 mm / 0.236 in
Interleaves	L	Yes

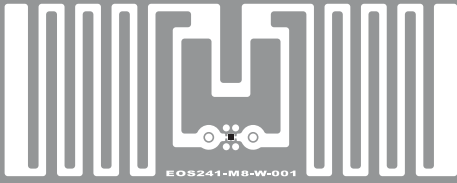

EOS-241 M830

T A G E O S

Packing Details

Dry - 6up

Product Code	2400000307
Delivery Format	Roll (Multi row)
Core Inner Diameter	76 mm / 2.99 in
Roll Outer Diameter	304 mm / 11.97 in
Unwinding Direction	Inlay on outside of roll
Standard Roll Size	180 000 (-0% +1.5%)
Min. Guar. Yield/Roll	99%
Box Dimensions	38.5 x 38.5 x 37.0 cm / 15.16 x 15.16 x 14.57 in
Roll/Box	1
Inlays/Box	180 000
Box Gross Weight	20.24 kg / 44.62 lbs
Pallet Dimensions	120 x 80 x 126 cm / 47.2 x 31.5 x 49.6 in
Boxes/Pallet	18
Inlays/Pallet	3 240 000
Pallet Gross Weight	389 kg / 858 lbs

Contact:

Tageos SAS (HQ) . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



© 2025 Tageos All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.