



EOS-430 U9 Zero™ Max

T A G E O S

Datasheet

Sustainability and Versatility For Global Retail and General Industrial Applications



T A G E O S

EOS-430 U9 Zero™ Max inlay adds minimized ecological impact due to the compact antenna design and excellent global RF performance of its base product EOS-430 U9. Plastic-free and based on FSC®-certified paper, the Zero Max inlay is apt for numerous applications, including brand protection and inventory management for apparel, fashion items and homewares, supply chain, logistics, and general industrial tagging purposes.

EOS-430 U9 Zero Max is available in dry, wet, and paper-face format.

The inlay uses NXP's UCODE 9 IC, which enables long read distance and fast inventory of dense RFID tag populations. The chip also features 96-bit EPC; kill password; EPC and kill password permalock; self-adjusting impedance; and memory integrity safeguards.

Tageos maintains annual ARC Quality Certification for all its manufacturing sites worldwide and was among the first companies to receive certification from the Auburn University RFID Lab in 2020. The EOS Zero Max inlay complies with ARC specifications F, I, L, O, Q, R, Y2, W5 and W6.

Tageos complies with ISO 9001:2025 Quality Management and ISO 14001:2015 Environmental Management as well as utilizing sustainable manufacturing processes and materials, such as FSC®-certified paper, whenever possible. In addition, all Tageos products meet the RoHS and REACH environmental directives.

Overview

IC:	NXP UCODE 9
EPC/User Memory:	96 bit / - bit
TID Memory:	96 bit incl. 48 bit unique S/N
Frequency Band:	860 - 960 MHz
Protocol:	EPC Class 1 Gen 2 ISO 18000-63

Application Areas

- Apparel
- Inventory Visibility
- Item Level Tagging
- Logistics
- Parts Management
- Supply Chain Management



The mark of
responsible forestry
FSC® C166692




EOS-430 U9 Zero™ Max

TAGEOS

Technical Overview

	Dry Inlay	Paper-face Inlay
Product Code	4300000040	4300000041
Antenna Size	70 x 8 mm 2.76 x 0.31 in	70 x 8 mm 2.76 x 0.31 in
Die-cut Size	- -	74 x 12 mm 2.91 x 0.47 in
Web Width	80 ± 1 mm 3.15 ± 0.04 in	80 ± 1 mm 3.15 ± 0.04 in
Pitch	16 ± 0.2 mm 0.63 ± 0.01 in	16 ± 1 mm 0.63 ± 0.04 in
ARC Approval	F, I, L, O, Q, R, Y2, W5, W6	F, I, L, O, Q, R, Y2, W5, W6
FSC® Certification	-	-
Antenna Material	Aluminium	Aluminium
Front Face	-	Paper
Inlay Substrate	Paper	Paper
Inlay Adhesive	-	Permanent
Liner	-	Paper
Operating Temperature	-20°C / +85°C -4°F / +185°F @20% to 80% RH	-20°C / +85°C -4°F / +185°F @20% to 80% RH
Shelf Life	2 years @ +25°C/40%RH	2 years @ +25°C/40%RH
Final Inspection	100% tested	100% tested

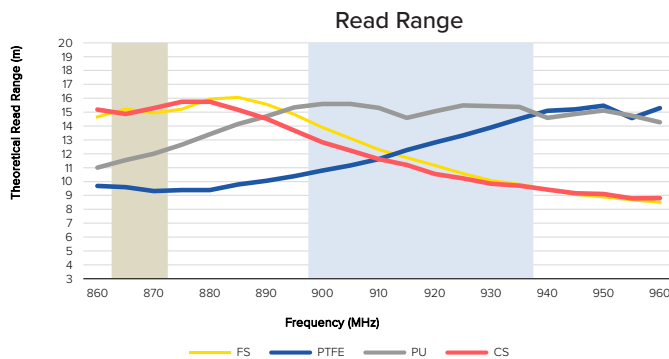

Contact us:
Tageos HQ . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



Graphs: All the graphs are indicative; performance in real life applications may vary. The data has been determined based on calculations for transmitters with a normal output power level and respective IC silicon. **Storage & handling precautions:** Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use. This is a general purpose product not designed or intended for any specific application.

© 2025 Tageos. All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.




EOS-430 U9 Zero™ Max

T A G E O S

Product Specifications

Mechanical Dimensions

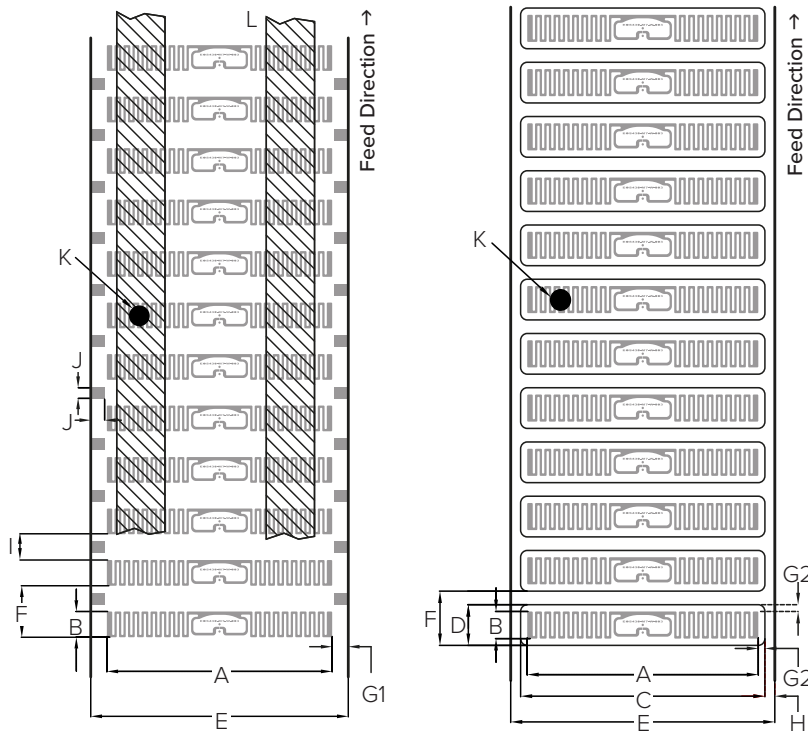

	Dry Inlay	Paper-face Inlay
Product Code	4300000040	4300000041
Antenna Size	A x B 70 x 8 mm / 2.76 x 0.31 in	70 x 8 mm / 2.76 x 0.31 in
Die-cut Size	C x D -	74 x 12 mm / 2.91 x 0.47 in
Web Width	E 80 ± 1 mm / 3.15 ± 0.04 in	80 ± 1 mm / 3.15 ± 0.04 in
Pitch	F 16 ± 0.2 mm / 0.63 ± 0.01 in	16 ± 1 mm / 0.63 ± 0.04 in
Antenna to Web Edge	G1 5 ± 1 mm / 0.20 ± 0.04 in	-
Antenna to Die-Cut	G2 -	2 ± 1 mm / 0.08 ± 0.04 in
Die-cut to Web Edge	H -	3 ± 1 mm / 0.12 ± 0.04 in
Antenna Gap	I 8 mm / 0.31 in	-
Converting Spot	J 4 x 3.6 mm / 0.16 x 0.14 in	-
Bad Mark	K Ø 6 mm / 0.24 in	Ø 6 mm / 0.24 in
Interleaves	L yes	no



EOS-430 U9 Zero™ Max

T A G E O S

Packing Details

	Dry-Inlay	Paper-face Inlay
Product Code	4300000040	4300000041
Delivery Format	Roll (single row)	Roll (single row)
Core Inner Diameter	76 mm / 2.99 in	76 mm / 2.99 in
Roll Outer Diameter	299 mm / 11.77 in	188 mm / 7.40 in
Unwinding Direction	Inlay on outside of roll	Inlay on outside of roll
Standard Roll Size	35 000 (-0% +1.5%)	6 000 (-0% +1.5%)
Min. Guar. Yield/Roll	99%	99%
Box Dimensions	39.5 x 39.0 x 17.0 cm / 15.5 x 15.3 x 6.7 in	26.0 x 26.0 x 37.0 cm / 10.2 x 10.2 x 14.5 in
Roll/Box	1	4
Inlays/Box	35 000	24 000
Box Gross Weight	6.33 kg / 13.96 lbs	7.13 kg / 15.72 lbs
Pallet Dimensions	120 x 80 x 151 cm / 47.2 x 31.5 x 59.4 inch	120 x 80 x 126 cm / 47.2 x 31.5 x 49.6 inch
Boxes/Pallet	48	36
Inlays/Pallet	1 680 000	864 000
Pallet Gross Weight	329 kg / 725 lbs	282 kg / 622 lbs

Contact us:
Tageos HQ . 1340 rue de Pinville . 34000 Montpellier . France . sales@tageos.com



© 2025 Tageos All rights reserved. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.